



CYCLONE SEPARATOR

MODEL DC7

HIGH EFFICIENCY STAINLESS STEEL SEPARATOR

Benefits

All stainless steel separator, employing the Super Cyclone-Effect to efficiently separate condensate from steam, air and gases*.

1. Unique SCE separator's efficiency can deliver high-quality steam up to 99.8% dryness.
2. All-welded, maintenance-free construction.
3. Compact and light weight.
4. All parts made from stainless steel with high durability and corrosion resistance for long service life.



CAUTION DO NOT DISASSEMBLE OR REMOVE THIS PRODUCT WHILE IT IS UNDER PRESSURE. Allow internal pressure of this product to equal atmospheric pressure and its surface to cool to room temperature before disassembling or removing. Failure to do so could cause burns or other injury. READ INSTRUCTION MANUAL CAREFULLY.

* Do not use for toxic, flammable or otherwise hazardous gases.

Specifications

Model		DC7	
Connection		Screwed	Flanged
Size (in)		1/2, 3/4, 1, 1 1/2, 2	1 1/2, 2
Maximum Operating Pressure (psig)	PMO	362	
Maximum Operating Temperature (°F)	TMO	572	
Maximum Allowable Pressure (psig)	PMA	362	
Maximum Allowable Temperature (°F)	TMA	572	


Connections and sizes in bold are standard




To avoid abnormal operation, accidents or serious injury, DO NOT use this product outside of the specification range. Local regulations may restrict the use of this product to below the conditions quoted.

No.	Description	Material	ASTM/AISI*	JIS
①	Body	Cast Stainless Steel	A351 Gr.CF8	—
②	Separator	Cast Stainless Steel	A351 Gr.CF8	SCS13
③	Separator Body	Stainless Steel	AISI304	SUS304
④	Separator Bottom	Cast Stainless Steel	A351 Gr.CF8	—
⑤	Baffle	Stainless Steel	AISI304	SUS304
⑥	Flange	Cast/Stainless Steel **	A351 Gr.CF8/AISI304	-/SUS304
⑦	Nameplate	Stainless Steel	AISI304	SUS304

* Equivalent ** Material depends on flange specifications

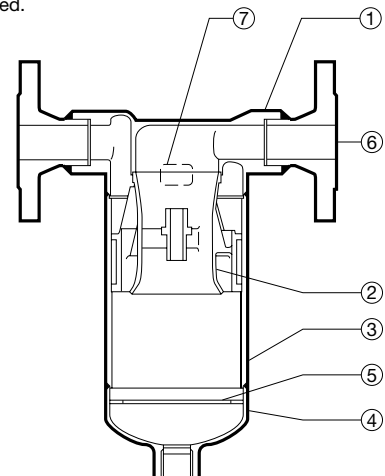

Flow Rate (Steam)

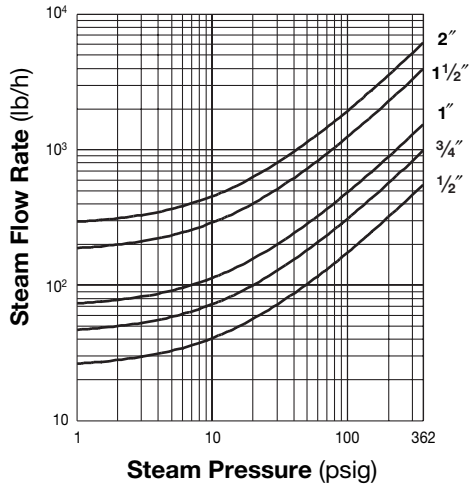


The chart above is used to determine the steam flow rate through the DC7 separator. It is based on a steam velocity of 100 ft/s. For other velocities, calculate the flow rate as follows:

$$\text{Flow Rate (at } v \text{ ft/s)} = \text{Flow Rate (at 100 ft/s)} \times \frac{v}{100}$$

It is recommended that velocities not exceed 100 ft/s.


Pressure Loss (Steam)

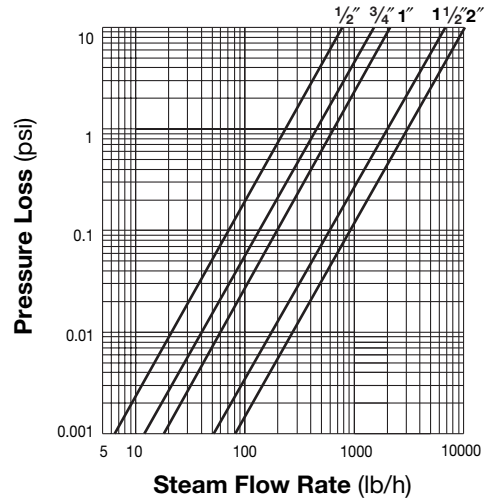

The pressure loss chart is based on a steam pressure of 150 psig. For other pressures, multiply the steam flow rate by the correction factor given in the table below. Use the result on the pressure loss chart.

Pressure (psig)	10	50	100	150	200	300	362
Flow Rate Correction Factor	2.32	1.54	1.16	1.00	0.90	0.72	0.67


Flow Rate (Air)

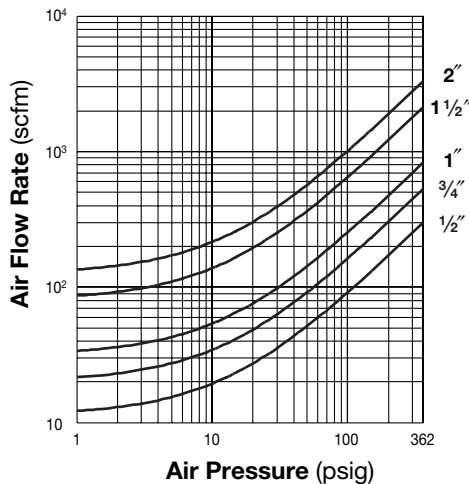

The chart above is used to determine the air flow rate through the DC7 separator. It is based on an air velocity of 100 ft/s. For other velocities, calculate the flow rate as follows:

$$\text{Flow Rate (at } v \text{ ft/s)} = \text{Flow Rate (at 100 ft/s)} \times \frac{v}{100}$$

Pressure Loss (Air)

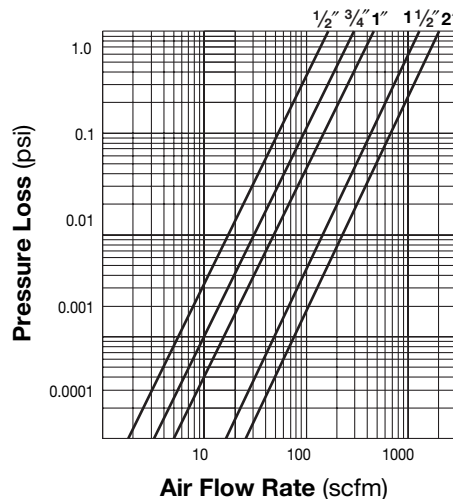


The pressure loss chart is based on an air pressure of 150 psig. For other pressures, multiply the air flow rate by the correction factor given in the table below. Use the result on the pressure loss chart.

Pressure (psig)	10	50	100	150	200	300	362
Flow Rate Correction Factor	6.78	2.56	1.44	1.00	0.80	0.52	0.44

Dimensions

● **DC7 Screwed**




DC7 Screwed* (in)

Size	L	H	H ₁	φW ₁	Weight (lb)
1/2	5 1/8	9	8 1/4	3 1/2	7.5
3/4					
1	5 7/8	10 3/8	9 7/16	4	12
1 1/2	6 11/16	12 13/16	11 5/8	4 1/2	14
2	8 11/16	15 5/8	14 3/16	6 1/2	33

* NPT, other standards available

● **DC7 Flanged**




DC7 Flanged (in)

Size	L		H	H ₁	φW ₁	Weight* (lb)
	ASME Class					
	150RF	300RF				
1 1/2	9 7/8	10 3/16	12 13/16	11 5/8	4 1/2	27
2	13	13 1/4	15 5/8	14 3/16	6 1/2	49

Other standards available, but length and weight may vary
* Weight is for Class 300RF

Flange classes in bold are standard

Separation Efficiency

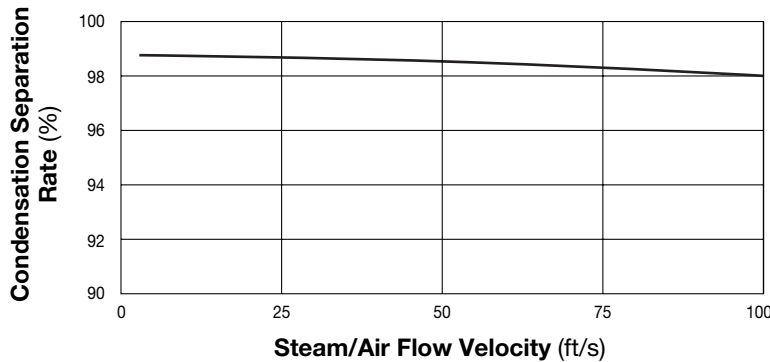

Accuracy: ±2%

Condensation: 90 - 110 lb/h

$$\text{Separation rate (\%)} = \frac{\text{Quantity of condensate discharged}}{\text{Quantity of incoming condensate}} \times 100\%$$

Note: It is recommended that steam flow velocities not exceed 100 ft/s

Quality of Exiting Vapor Stream:

Example: 1000 lb/hr mass flow with a dryness fraction of 0.90 (i.e., 900 lb/hr vapor, 100 lb/hr water) enters the separator. With an efficiency of 98%, 98 lb/h of water is separated from the stream (100 lb/h × 0.98 = 98 lb/h). Outlet side total mass flow will be 902 lb/h (i.e., 900 lb/h vapor, 2 lb/h water (100 lb/h - 98 lb/h)).

$$\text{Resulting dryness fraction} = \frac{\text{Vapor mass flow}}{\text{Total mass flow}} = \frac{900 \text{ lb/h}}{902 \text{ lb/h}} = 0.9978$$


Note: Does not apply to the separation of fine entrained mist. Contact TLV for details concerning mist elimination procedures.

Steam Trap Selection

The DC7 separator does not have a built-in steam trap. A trap will need to be installed for the proper removal of condensate from the system. Choose an appropriate trap for the application from the table below.

Steam Pressure	Low (up to 250 psig)	High (up to 362 psig)
DC7 Size	Suitable Steam Traps	Suitable Steam Traps
1/2"	FS3, SS1, SS3	FS5, SS5
3/4"	FS3, SS1, SS3	FS5, SS5
1"	FS3, SS1, SS3	FS5, SS5
1 1/2"	FS5, SS5	FS5, SS5
2"	FS5, SS5	FS5, SS5

Steam Trap Installation (Vertical & Horizontal)

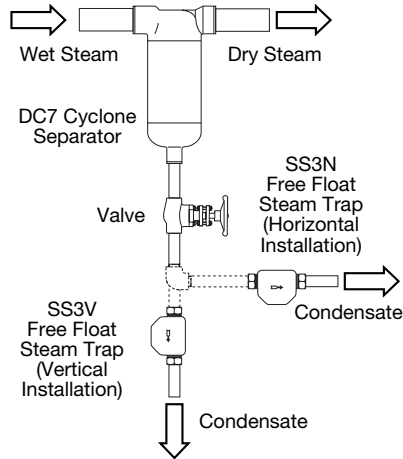


Air Trap Selection

The DC7 separator does not have a built-in air trap. A trap will need to be installed for the proper removal of condensate from the system. Choose an appropriate trap for the application from the table below.

Air Pressure	Low (up to 300 psig)	High (up to 362 psig)
DC7 Size	Suitable Air Trap	Suitable Air Trap
1/2" - 2"	SS1VA	SH5NLA*


* SH5NLA is cast steel, stainless steel version available on special order

Air Trap Installation (Vertical)

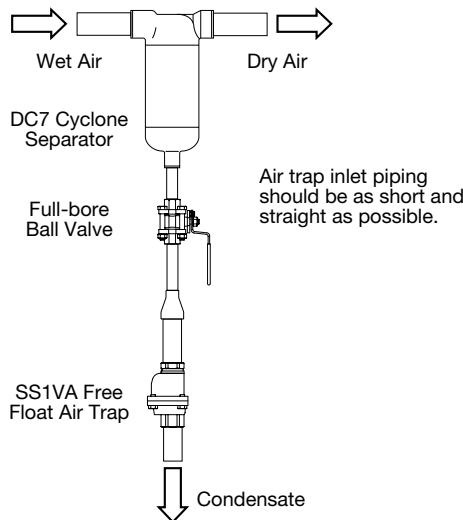

Air Trap Installation (Horizontal)

When the horizontal installation of an air trap is required, a pressure-balancing line must be connected from the balancing port on the air trap to a place above any possible condensate accumulation.

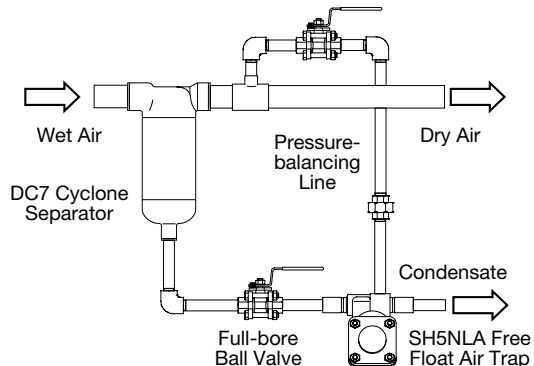

TLV CORPORATION

13901 South Lakes Drive, Charlotte, NC 28273-6790
 Phone: 704-597-9070 Fax: 704-583-1610
 E-mail: tlv@tlvengineering.com
 For Technical Service 1-800 "TLV TRAP"



Manufacturer

TLV CO., LTD.

Kakogawa, Japan

is approved by LRQA Ltd. to ISO 9001/14001

ISO 9001/ISO 14001

